

Kabul Edilmiş Araştırma Makalesi (Düzenlenmemiş Sürüm)

Accepted Research Article (Uncorrected Version)

Makale Başlığı / Title

Impact of small cell user density on performance of small cells sleeping technique for HetNet

HetNet için küçük hücre kullanıcı yoğunluğunun küçük hücre uyutma tekniği performansı üzerindeki etkisi

Yazarlar / Authors

Sultan ALDIRMAZ ÇOLAK

Referans No / Reference No

PAJES-73468

DOI

10.5505/pajes.2018.73468

Bu PDF dosyası yukarıda bilgileri verilen kabul edilmiş araştırma makalesini içermektedir. Sayfa düzeni, dizgileme ve son inceleme işlemleri henüz tamamlanmamış olduğundan, bu düzenlenmemiş sürüm bazı üretim ve dizgi hataları içerebilir.

This PDF file contains the accepted research article whose information given above. Since copyediting, typesetting and final review processes are not completed yet, this uncorrected version may include some production and typesetting errors.



© - š œ ° · « ¢ · - © š " " · œ j " " · ± - j ® · Ÿ j a - ¥ ° μ · «
° j œ α a ¥ « ® j fl j ° " j °
fl j ° " j ° · Ç Ç ¥ a α š œ ® j · š ± " " š a á œ á · μ « Ô ± a " ± (

Sultan ALDIRMAZ ÇOLAK

¹Electronics and Communication Engineering, Engineering Faculty, Kocaeli University, Kocaeli, Turkey.
sultanaldirmaz@gmail.com

Received / Kabul Tarihi: 13.04.2018 / Accepted / Kabul Tarihi: 16.08.2018
* Corresponding author / İletişim için yazar

doi: 10.5505/pajes.2017.3468
Research Article / Araştırma Makalesi

Abstract

In this paper, we analyze the impact of the small cell user density on power consumption and the number of served users by the macro and small cells. It is assumed that users are distributed uniformly over the coverage area with different densities. The small cell user density is related linearly with macro cell user density. In the simulation, different mean values are chosen, where the power consumption and number of served users by the macro cell and small cells are investigated according to these values. The simulation results show that as the mean value of the small cell user density increases, the power consumption of the macro cell is reduced and the number of served users by the macro cell is increased. When the mean value of the small cell user density is equal to 15, the power consumption of the macro cell is reduced by 695 Watts. When the mean value of the small cell user density increases, the power gain obtained by the algorithm decreases.

Keywords: Heterogeneous network, Macro cell, Small cell, Traffic offloading, User density

Öz

Bu çalışmada, küçük hücre kullanıcı yoğunluğunun makro ve küçük hücreler tarafından sağlanan hizmet alanındaki etkisi analiz edilmiştir. Kullanıcılar farklı yoğunlukta homojen olarak hizmet alanı üzerinde dağılmıştır. Küçük hücre kullanıcı yoğunluğu makro hücre kullanıcı yoğunluğu ile doğrusal olarak ilişkilendirilmiştir. Simülasyon için farklı ortalamalar seçilmiştir ve bu değerlere göre makro hücre ve küçük hücreler tarafından sağlanan güç tüketimi ve kullanıcı sayısı araştırılmıştır. Simülasyon sonuçları, küçük hücre kullanıcı yoğunluğunun artmasıyla makro hücre kullanıcı yoğunluğunun artmasıyla makro hücre kullanıcı sayısı artmakta ve güç tüketiminin azalmaktadır. Küçük hücre kullanıcı yoğunluğunun ortalaması 15 olduğunda makro hücre kullanıcı sayısı 695 Watt artmıştır. Küçük hücre kullanıcı yoğunluğunun artmasıyla makro hücre kullanıcı sayısı artmakta ve güç tüketimi azalmaktadır.

Anhtar kelimeler: Heterojen ağ, Makro hücre, Küçük hücre, Trafik offloading, Kullanıcı yoğunluğu

1 Introduction

While total mobile data traffic was 45 million terabytes (TB) in 2012, this traffic is expected to reach 623 million TB until 2020 [1]. It is clear that this forecast seems to be very realistic, since many devices are expected to join the network due to the emerging internet of things (IoT) technologies. One of the important forecast is that, nearly 2% of global emissions are expected to be produced by the information and communication technology and the mobile communication industries by 2020 [2]. To reduce the amount of emissions, we need to reduce the amount of power consumed by so many devices. Therefore, many researchers study on energy efficient systems including green communication and massive multi-input multi-output (MIMO). Besides meeting increasing traffic demands, worldwide network operators agree that they need to reduce CO₂ emission.

The celebrated Shannon-Hartley capacity equation states that, the data rate depends on bandwidth and the signal to noise ratio (SNR). In cellular communication systems, signal to interference plus noise ratio (SINR) is used instead of SNR. While the desired signal strength decreases as the user moves away from the base station (BS), the interference signals from other cells gradually increase. This fact causes degradation of the SINR and therefore, the data rate provided by the base

station decreases. Since the SINR value of the received signal at edge of the cells may have a low value, to provide a good coverage and to increase data rate, power small cells (SCs) can be placed in these regions. In this manner, heterogeneous networks (HetNet) are constituted and they not only provide coverage for smaller area which has high user density, but also provide high data rate for users in this area. HetNets are increasingly attracting attention due to their capability of supplying high data rates everywhere and all times demanded by the users with lower CO₂ emissions [3],[5]-[10]. Small BSs (SBSs) are responsible for providing good coverage where the population is high, such as malls, coffee shops, and airports with reduced power consumption. Small cells are especially more functional when employed in places where the fluctuation in the population is very high such as stadiums, concert halls, and theaters. The users can be offloaded from LTE system to Wi-Fi according to the number of traffic load. However, since the number of users to be served by a SBS is limited, more than a certain number of users should receive service from the macro BS (MBS). In a highly populated region, users can be offloaded from the MBS to an SBS, if this SBS is in sleeping mode. This process is called as traffic offloading. HetNets are favored due to their properties of energy efficiency (EE) by using low-powered nodes and traffic offloading. In Europe, approximate power consumption of a typical MBS and a typical SBS is 930W and 10W, respectively [1]. Since the power consumption of, for example, a hundred active SBS

much higher than a single MBS, usage of a hundred SBSs represents computer simulation results. Finally our paper heterogeneous network does not provide energy efficiency concludes in Section 5.

Therefore, to obtain energy efficiency in network densification scheme, SCs should be activated (active or sleep mode)

carefully by serving heterogeneous network. Recently, many attention has been directed towards this problem [4]. In

the SBS activation process, algorithms should consider the interference from SBSs to MBS. In order to reduce this

interference some processing should be applied, such as using different frequency bands in small and MCs, or using

interference excision algorithms at the receiver at the expense of increased receiver complexity. In the literature, it is assumed

that an MBS, which is placed in the center of the cell, is always active in the heterogeneous network and responsible

minimizing the interference which SBS generates.

Recently, an outstanding paper is proposed small cell activation in order to reduce HetNet power consumptions for uniform and

non-uniform user distribution [13]. In this paper, power consumption of MC, SC and HetNet are calculated with respect

to MC user density. The authors of [13] introduced two modes. However, they do not take into account that an SC can

served only a limited number of users. In a recent paper, [14],

three different algorithms that evaluate the power usage of user case are proposed, which further improve the results

presented in [13]. Furthermore, the algorithms presented in [14] have lower computational complexity than that of [13]. In

[13], the SBS switching mode algorithm is based on distance between MBS and SBSs, and user densities. However, in

[14], it includes a hybrid algorithm as well as those. Another remarkable study [15] investigates the base station (BS)

density for homogeneous and HetNet scenarios with the sleeping strategy in order to improve EE. The authors assume

that the BS enters the sleeping mode if there is no user in BS coverage area. According to this sleeping strategy, they derive

BS activation probabilities and the coverage probabilities for different BS density [15]. They also show that the upper

bound of the EE is independent of user density. The authors assumed that SC user density varies uniformly with MC user

density with a single mean value of SC user density. However to the best of our knowledge, there are studies which

investigate SC user density impact on the number of users served by MC and SCs. In this paper, we evaluate the

performance of the power consumption of SBS, MBS and HetNet for uniform user distribution with different mean values

Furthermore, the variation on number of users who receive service from SC and MC with different user density is analyzed

by taking into account traffic offloading. The main contributions of the paper are summarized as follows:

- < We assume that number of users served by SC is limited as in practical case,
- < The features of user distribution, i.e., mean and variance of the traffic, are taken into account while calculating the power consumption,
- < Power consumption is analyzed whether the proposed algorithm in [14] is used or not.

The paper is organized as follows. Section 2, the heterogeneous network model and its power consumption are

discussed. Section 3 gives a short overview about SC activation algorithm which is used throughout the paper. Section 4

2 System model

In this section, the system model is introduced first, and then network traffic load based power consumption expressions are derived.

2.1 Network model

The proposed heterogeneous network model is shown in Figure 1. According to this model, an MBS is placed in the center of the cell. Along with the MBS, the cell also includes

SBSs to provide coverage. These SBSs can be operated in active or sleep mode depending on traffic load of the considered cell. If an SBS

is operated in sleep mode, user equipment (UE) can be served by the MBS; otherwise it is served by an SBS. The MBS

should be always active at all time and behave as an umbrella in order to provide coverage in the whole cell area. Moreover,

the MBS should be responsible for controlling of all SBSs and minimizing the interference.

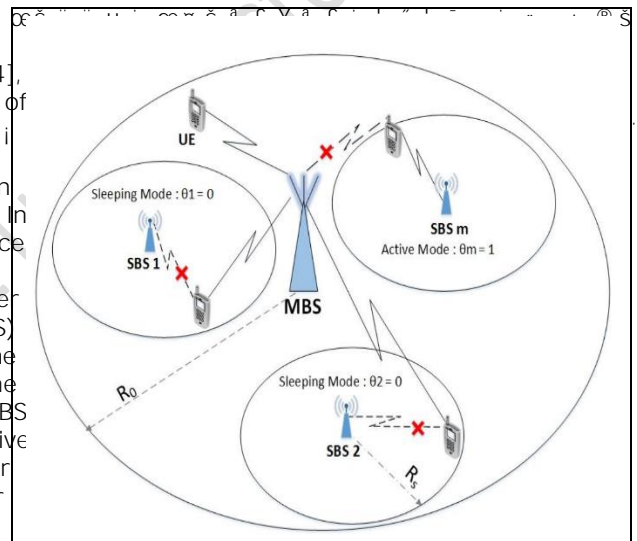


Figure1: HetNet system model.

Let all of the SBSs be element of the set \mathcal{S} . The vector θ indicates their operation mode (active or sleep). If the m th SBS is in active mode, then $\theta_m = 1$.

Let us also assume N be the number of active SBSs. Let \mathcal{U} be the number of users who receive service from the MBS, where N can be

modelled by a Poission distribution. Here, λ is a random variable with its mean λ .

Here, \mathcal{A} and \mathcal{C} denote coverage areas of entire area outside from all active SBSs and SCs areas, respectively. Also \mathcal{U}_M and \mathcal{U}_S are user

density of the MC and SC. According to our system model, \mathcal{U}_S is modelled as a uniform random variable that depends on

Figure 2 shows probability distribution function (pdf) of user density of an SC. Expected value of an SC user distribution, which obeys the uniform distribution, is given by Eq (1)

$$f(u) = \frac{1}{b-a} \quad \text{for } a \leq u \leq b \quad (1)$$

where a and b are respectively.

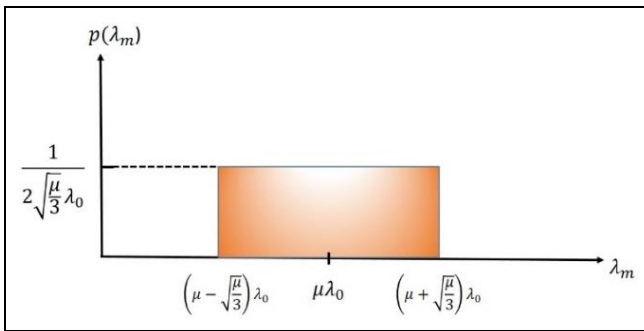


Figure 2: Probability distribution function of user density of an SC.

2.2 Power consumption model

The power consumption characteristics of an MC and an SC differ greatly. Lower band of power consumption in BS is 712 Watts [1], [13]. This value increases exponentially with the traffic load of the cell. However, an SBS only consumes 10 Watts if it operates in active mode, whereas in sleep mode, it consumes 3 Watts. Unlike the MBS, it is assumed in the literature that the power consumption of an SBS is independent of the traffic load, since the coverage area of the SC is very small compared that of the MBS. Therefore, by offloading MC users in areas, which have high traffic load, to SCs, it is possible to reduce power.

The power consumption of an MBS can be written as a function of the traffic load by (2)

$$P_{MBS} = P_{idle} + \alpha \lambda_m P_{active} \quad (2)$$

Where P_{idle} denotes the power utilization coefficient and P_{active} is the transmit power which is related to traffic load of the macro BS and the switched off small BSs. Similarly, power consumption of an SBS can be expressed by (3)

$$P_{SBS} = P_{idle} + \beta \lambda_m P_{active} \quad (3)$$

where P_{idle} and P_{active} represent the power consumption of active mode and sleep modes, respectively. N_{SC} denotes the maximum number of SCs and α is the power utilization coefficient of an SBS. Thus, total power consumption of a HetNet is modeled by Eq (4)

$$P_{total} = P_{MBS} + N_{SC} P_{SBS} \quad (4)$$

Where N_{active} shows the number of active SBSs in the network and P_{diff} represents the power consumption which is the difference between the active and sleep modes. According to [11], to ensure the desired quality of service (QoS) for user below the required MBS transmit power depends on the number of the users in the network, (desired data rate R), bandwidth of the system (B), and the noise power (N). The required MBS transmit power can be calculated by [11].

$$P_{MBS} = \frac{R}{B} \left(\frac{N}{\eta} \right)^{\frac{1}{\alpha}} \quad (5)$$

Where η denotes loss of capacity due to modulation and coding and r indicate the distance from user to the MBS and the reference distance which is used for path loss model. P_{out} denotes the outage probability and D is the reference path loss. The received power decreases by a fixed path loss $(D/r)^\alpha$. As can be seen from Eq (5) that the power consumption increases with the traffic load, depending on the number of users (N). Since r is a random variable, P_{out} is also a random variable and its expected value ($E[P_{out}]$) should be calculated by taking into account

In [11] and [13], it is stated that P_{total} equals to the product of traffic load λ_m , where all coverage areas exclude all active SCs and average transmit power of a MBS per user, Z and Z_{SBS} are expressed by Eq (6) and Eq (7)

$$Z = \frac{P_{MBS}}{\lambda_m} \quad (6)$$

$$Z_{SBS} = \frac{P_{SBS}}{\lambda_m} \quad (7)$$

$$Z = \frac{P_{total}}{\lambda_m} \quad (8)$$

In [13], the authors assume that P_{total} does not take into account the maximum number of users for which SC can serve. As there is a limit on number of users served by an SC in a realistic scenario, some users in the SC coverage area, should take service from the MC. Therefore, unlike the scenario considered in [13], the authors in [14] modified the number of users who receive service from the MBS expressed by Eq (8)

$$Z = \frac{P_{total}}{\lambda_m} \quad (8)$$

It is clear that Z depends on not only cell area of MC and SCs, but also operation modes of SBSs. Moreover, [14] includes service from the SC due to limit on number of users of SC.

3 Small cell activation algorithm

In [14], authors have proposed three different algorithms which decide SC operation mode in the HetNets in order to

- Algorithm 1 is based on distance between SC and the MC,
- Algorithm 2 is based on density of the SC,
- Algorithm 3 is based on a hybrid algorithm considers both listed above.

In [14], Algorithm 3 is shown as the optimum algorithm among them. For this reason, in this paper, Algorithm 3 will be used in the analyses, whose computational complexity equals to $O(N)$ which is lower than that of the algorithm used in (2)-(9) in order to activate SBS gradually and calculate power consumption. For further details on this topic, the interested

readers are referred [13][16]. According to the algorithm, the saved power for all SCs are calculated iteratively and decided to close the SC which provides the highest power gain. The randomness of the SBS user density and the distance between and the MBS, are taken into account throughout this calculation. For example, we consider two different SCs and with user densities and and their distances from the MBS and , respectively. First, the algorithm sorts SCs according to user density in increasing order. Then, the system decides which SBS will be operated active or sleep mode, taking into account of their potential saved power.

4 Simulation results

In this section, power consumption of HetNet is investigated under different densities of SC. Throughout the simulations, we model user positions in the MC and SCs as uniformly distributed. In this paper, we only focus on the effect of SC user density on the power consumption and the number of served users by the MC and SCs, we assume that none of SC area is overlapped. Therefore, we can ignore the resultant interference. We also assume that the density of SC is always greater than that of MC. This assumption is applicable to crowded and close places, including airports, malls, and concert halls. We also follow [17] to consider a practical range for . For further details on this topic, the interested readers are referred to [19]. All system variables which are taken from [18], listed in Table 1.

Table 1: Meaning of parameters and symbols

Parameters	Values
MC radius,	500 m
SC radius,	10 m
Bandwidth of an MC,	10 MHz
Maximum allowable outage probability,	0.1 Mbit/sec
Reference distance in channel mode	0.05
Reference path loss,	1 m
Path loss exponent,	-35dB
Coverage area of an SC,	2.5
Area outside of all active SCs,	m ²
User density in ,	m ²
The maximum transmit power of a macro BS,	user /m ²
Base power level power consumption of macro BS,	40 Watt
Power consumption of an SC in sleeping mode,	712 Watt
Power consumption of an SC in active mode,	3 Watt
Capacity loss,	10 Watt
Noise power,	1
Power utilization coefficient for macro BS,	-74 dBm/Hz
	14.5

Figure 3 plots the total number of users served by the HetNet with respect to the MC user density. Three different mean values are chosen for the SC user distribution in order to

investigate variation of number of HetNet users. As seen from Figure 3, the number of users, that a HetNet can support, varies with the average value of . For example, when and , the maximum number of users that a HetNet can support, equals to 2488. Even if is greater than this value, the network cannot provide service for more than 2488 users. Likewise, when , the maximum number of users that the system can support is 2079. This value is reached when .

The number of users in the HetNet is given here, and this number is not related to the use of the proposed algorithm. The number of users supported by SCs, MC and HetNet with respect to are comparatively given in Figure 4. Figure 4 shows the numbers of served users by MC, SCs and HetNet which are generated by the considered algorithm using Eqs (2)-(9). In fact, the number of HetNet users can be found by summing up the number of MC users and SCs users. In this analysis and are chosen as 50 and 100 respectively. In Figure 4, while solid red and green lines represent the number of users of MC and SCs when the proposed algorithm is used, dotted lines of them represent the number of users of MC and SCs when the proposed algorithm is not used. Black denotes the number of users in the HetNet coverage area, which is summation of number of users in MC and SCs.

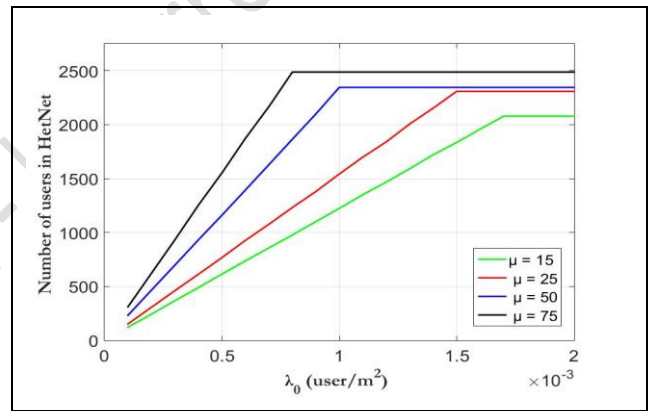


Figure3: Variation of the number of users in the HetNet for user density of the MBS.

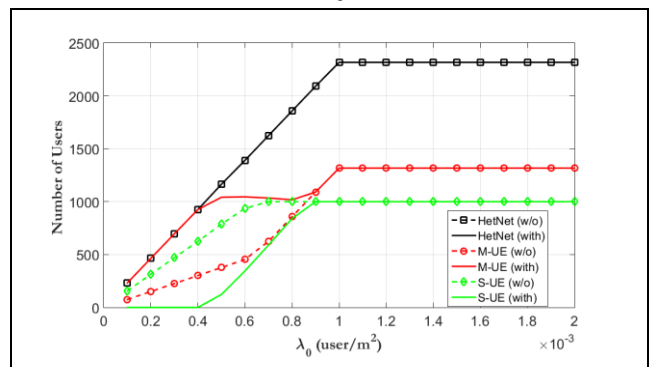


Figure4: Variation of the number of users in a HetNet where the proposed algorithm is used and not used. (w/o) in the MC, SUE: UE in the SCs, HetNet: UE in the HetNet, (w/o) and (with) mean that when the proposed algorithm is not used and used ().

As the user density increases, SCs save considerable power according to the algorithm when gradually activated. In this analysis, is chosen as 50. We have assumed that each SBS can serve only a limited number of maximum 10 users. If an SC has more than 10 users, the remaining users should take

service from the MBS. When the proposed algorithm is not used, each SC operates in active mode even if it has only one user. As seen in Figure 4, in case the algorithm is used, SCs are not activated until $\lambda_0 = 0.8$. On the other hand, if the algorithm is not used, SCs are activated linearly.

Since all SCs are operated in active mode beyond $\lambda_0 = 1.0$, solid and dotted curves for red and green lines are converged. Besides, red and green lines with different markers are overlapped at a certain value. The overlap means that all SBS in the HetNet are operated in active mode. Thus, at a value greater than $\lambda_0 = 1.0$, SBS reaches its maximum number of users which it can serve and beyond this value it can not serve more users anymore.

The number of users in the HetNet can be calculated by Eq (9)

$$N = \frac{A \cdot \lambda_0}{\mu} \quad (9)$$

The power consumption of HetNet is evaluated and the result is shown in Figure 5 as a function of user density. As the user density of SCs increases, power consumption also increases because all SCs are activated faster. The lowest user density is plotted with green line, which has the lowest mean value. The power consumption reaches its maximum at $\lambda_0 = 1.0$. In other words, SCs are activated slowly with the reason for reaching the same power consumption on all lines is that at their saturation point, all SCs are activated. When all of the SCs are operated in active mode, the total power of HetNet is calculated as

2292 Watts. When all SCs are operated in active mode (saturation point), HetNet operates at its maximum capacity. We note that all lines in the simulation denote SC user density with different mean values ($\mu = 15, 25, 50, 75$), and thus they reach their maximum value at different values ($\lambda_0 = 0.8, 1.0, 1.2, 1.4$). Beyond $\lambda_0 = 1.0$, the HetNet can't serve more users.

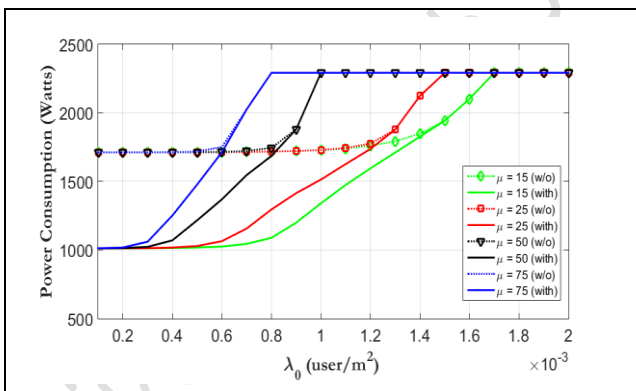


Figure 5: HetNet power consumption w.r.t the MC user density ((w/o) and (with) mean that when the proposed algorithm is not used and used).

Finally, Figure 6 shows the HetNet power consumption with different mean values of SC user density in the network for the case where the algorithm is used and not used. In this analysis, user density of the MC is selected as $\lambda_0 = 5 \times 10^{-4}$ and $\lambda_0 = 10 \times 10^{-4}$. When $\lambda_0 = 5 \times 10^{-4}$, all SCs are activated the highest mean value case. Thus, the power consumption is equal (there is no saved power) to each other where the algorithm is used or not used. In the other cases, especially for $\lambda_0 = 10 \times 10^{-4}$, the saved

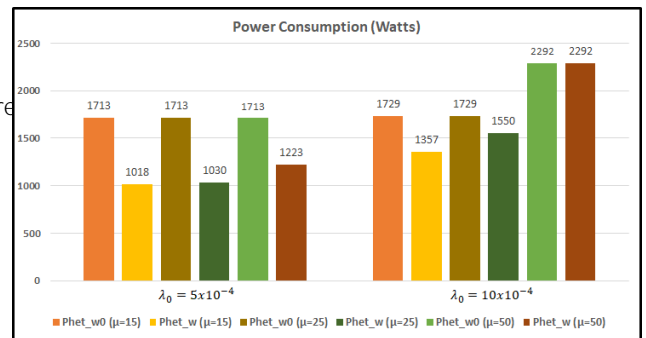


Figure 6: Power consumption of the HetNet with the MC user density ((w/o) and (with) mean that when the proposed algorithm is not used and used).

5 Conclusions

In this paper, we have considered SC user density variation impact on HetNet power consumption. We have assumed that the heterogeneous network has an MBS in the center of the cell and it contains SBSs. In order to save the power, SCs are gradually activated according to traffic load of the HetNet. Due to traffic offloading from MC to SCs, the system does not only save power but also it can serve more UEs. According to simulation results, as the user density of SCs increases, system gets saturated faster. It is also seen that when the traffic load λ of the MC increases, it leads to a faster network saturation. Then the cell reaches saturation and cannot serve more users. When UEs are placed in some specific regions, a few of the SCs can be activated, thus more power is saved. Simulation results indicate that the user density of macro cell increases twice saved power by using the small cell sleeping technique decreases by half for $\mu = 15$. Similarly, as the mean value of the small cell user density increases, the power gain obtained by the algorithm also decreases. In other words, the sleeping algorithm can be implemented effectively when the below conditions are fulfilled:

- ◁ When the MC user distribution is low ($\lambda_0 = 5 \times 10^{-4}$), more power is saved (Fig 4),
- ◁ When the mean value of SC user distribution is low, more power is saved (Fig 5, Figure 6).

When the majority of SCs do not have high user density, only a few SC can be activated, thus more power is saved.

6 References

- [1] Auer G, Blume O, Giannini V, Godor I, Imran MA, Jading Y, Katranaras E, Olsson M, Sabella D, Skillermark P, Wajda W. Energy efficiency analysis of the reference systems, areas of improvements and target > Energy Aware Radio Network Technology (EARTH), 7, 1-68, 2012.
- [2] Webb M. "SMART 2020: Enabling the low carbon economy in the information age" The Climate Group. London, 1-87, 2008.
- [3] Saker L, Elayoubi SE, Chahed T, Gati A. "Energy efficiency and capacity of heterogeneous network deployment in LTE-Advanced" European Wireless 2012: 13th European Wireless Conference 2012, Poznan, Poland, 120 April 2012.

[4] Zhang H, Chu X, Gao W and Wang S. "Coexistence of FiWi and heterogeneous SC networks sharing unlicensed spectrum" *IEEE Communications Magazine* 53(3), 158-164, 2015.

[5] Y. Jiang, J. Zhang, and S. Zhou, "Energy-efficient ultra-dense cellular networks" *IEEE Wireless Communications Magazine* 51(6), 2027, 2013.

[6] B. Li, J. Zhang, and S. Zhou, "Ultra-dense cellular networks" *IEEE Wireless Communications Magazine* 53(1), 72-79, 2016.

[7] Bhushan N, Li J, Malladi D, Gilmore R, Brenner D, Damjanovic A, Sukhvasi R, Patel C, Geinhofer S. "Ultra-dense networks: A tutorial" *IEEE Communications Magazine* 52(2), 82-9, 2014.

[8] Andrews JG, Buzzi S, Choi W, Hanly SV, Lozano A, Song J, Veeraraghavan R. "Coverage and energy efficiency of heterogeneous cellular networks" *IEEE Journal on Selected Areas in Communications* 32(6), 1061-1082, 2014.

[9] 3GPP. "3GPP TSG RAN WG1 R1-150111: Study on NR (5G) NR RAN Architecture" <http://www.3gpp.org/news-events/conferences/1515etsisummiton-futuremobile-and-5g> (11.04.2018).

[10] Shakir MZ, Qarage KA, Tabassum H, Aloini MA, Serpedin E, Imran MA. "Green heterogeneous small cell networks: Toward reducing the CO₂ emissions of mobile communications industry using uplink power adaptation" *IEEE Communications Magazine* 51(6), 52-61, 2013.

[11] Luo S, Zhang R, Lim TJ, "Optimal power and range adaptation for green broadcasting" *IEEE Transactions on Wireless Communications* 12(9), 4592-4603, 2013.

[12] Vereecken W, Deruyck M, Colle D, Joseph W, Pickavet M, Martens L., Demeester P. "Evaluation of the potential for energy saving in macrocell and femtocell networks using a heuristic introducing sleep modes in base stations". *EURASIP Journal on Wireless Communications and Networking* 2012: 114, 2012.

[13] Cai S, Cai Y, Duan L, Wang J, Zhou S, Zhang R. "Green 5G heterogeneous networks through dynamic small cell operation" *IEEE Journal on Selected Areas in Communications* 34(5), 1103-1115, 2016.

[14] Details are hidden under the double privacy policy.

[15] Z. Yang, Z. Zhang, S. J. Lee, and S. A. Lee. "Station density for high energy efficient cellular networks with energy harvesting" *IEEE Transactions on Vehicular Technology* 65(9), 7507-7514, 2016.

[16] Namdar M., Ilhan H., and Durak S. "ZigBee and chirp based transform based spectrum sensing and utilization" *IEEE Signal Processing* 4(4), 320329, 2014.

[17] Che YS, Duan L, Zhang R. "Energy efficient communication maximization of wireless power communication networks" *IEEE J. Sel. Areas Commun*, 33(8), 1534-1548, 2015.

[18] Samarakoon S, Bennis M, Saad W, Debbah M, Latvaaho M. "Ultra dense small cell networks turning density into energy efficiency" *IEEE Journal on Selected Areas in Communications* 34(5), 1267-1280, 2016.

[19] "3GPP TR 36.872: Study on NR (5G) NR RAN Architecture" <http://www.3gpp.org/ftp/Specs/archive/36-series/36.872/36872-0.zip>